


Three flue gas passes steel jet burner boilers

RTS 2S

Products up to 400 kW only for replacement, till 1st January 2018, in conformity of point 2 (G) Article 1 of Regulation EU N. 813/2013.

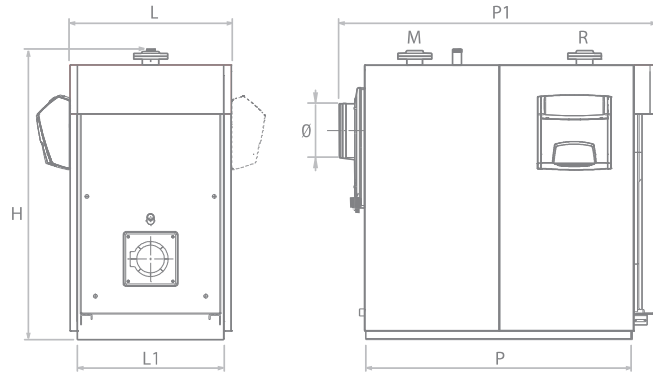

- Single-piece steel boilers with three flue gas passes, that can be matched with jet burners
- The particular geometry of the heat exchange allows to reduce the permanence time of flue gases in the high temperature zones while decreasing in this way the formation of NO_x for low polluting emissions

| Description | H mm | L mm | P mm | L1 mm | P1 mm | M DN | R DN | Ø DN | Net weight kg |
|-------------|---------|---------|---------|----------|----------|---------|---------|---------|------------------|
| RTS 115 2S | 1205 | 660 | 860 | 580 | 1155 | 2" | 2" | 180 | 335 |
| RTS 150 2S | 1285 | 710 | 1010 | 640 | 1330 | 2" | 2" | 200 | 450 |
| RTS 200 2S | 1390 | 760 | 1180 | 690 | 1500 | 2" 1/2 | 2" 1/2 | 250 | 515 |
| RTS 247 2S | 1390 | 760 | 1180 | 690 | 1500 | 2" 1/2 | 2" 1/2 | 250 | 535 |
| RTS 319 2S | 1524 | 820 | 1296 | 750 | 1660 | 2" 1/2 | 2" 1/2 | 250 | 715 |
| RTS 410 2S | 1490 | 820 | 1596 | 750 | 1960 | DN80 | DN80 | 250 | 840 |
| RTS 526 2S | 1685 | 890 | 1692 | 790 | 2085 | DN80 | DN80 | 300 | 1160 |
| RTS 736 2S | 1830 | 1000 | 1965 | 900 | 2375 | DN100 | DN100 | 350 | 1500 |
| RTS 850 2S | 1830 | 1000 | 1965 | 900 | 2375 | DN100 | DN100 | 350 | 1500 |
| RTS 1012 2S | 1920 | 1047 | 2236 | 980 | 2657 | DN125 | DN125 | 350 | 2075 |
| RTS 1200 2S | 1920 | 1047 | 2236 | 980 | 2657 | DN125 | DN125 | 350 | 2075 |
| RTS 1355 2S | 2080 | 1147 | 2533 | 1070 | 2954 | DN125 | DN125 | 400 | 2575 |
| RTS 1500 2S | 2080 | 1147 | 2533 | 1070 | 2954 | DN125 | DN125 | 400 | 2575 |
| RTS 1850 2S | 2222 | 1237 | 2754 | 1160 | 3173 | DN150 | DN150 | 450 | 3390 |

Pressurized steel boilers, that can be matched with any fuel jet burners. Provided with completely wet combustion chamber with free dilation and three passes flue path. The flue pipes are equipped with removable stainless steel turbulators, which allow to optimize the efficiency of the heat exchange without increasing head losses.

The door features an ambidextrous opening and is provided with a peephole with pressure intake. Casing is made of stove-enamelled sheet. Shell and flue gas zone are easy to reach for maintenance. The control panel should be ordered separately.

- High efficiency both punctual and seasonal
- Operation at modulating temperature (minimum allowed return temperature 50 °C)
- Several solutions thanks to the combination with RIELLOtech control panels
- Maximum operating pressure: 6 bar.

TECHNICAL DATA

| Description | Output kW | | Efficiency | | Back-pressure in combustion chamber mbar | Notes | Code |
|--------------------|----------------------|---------------------|--------------------|--------------------------------|--|-------|-----------------|
| | Useful max 80°/60°** | Furnace heat output | Pn max (80°/60°) % | Reduced load 30% of Pn (30 °C) | | | |
| RTS 115 2S | 125 | 115 | 92,2 | 97,2 | 1,2 | | 20150418 |
| RTS 150 2S | 163 | 150 | 92,2 | 97,2 | 1,6 | | 20150304 |
| RTS 200 2S | 216 | 200 | 92,7 | 97,2 | 1,8 | | 20150305 |
| RTS 247 2S | 264 | 247 | 93,5 | 97,2 | 3 | | 20150410 |
| RTS 319 2S | 341 | 319 | 93,5 | 97,2 | 2,4 | | 20150412 |
| RTS 410 2S | 439 | 410 | 93,5 | 97,2 | 3,7 | | 20150416 |
| RTS 526 2S | 563 | 526 | 93,5 | 97,2 | 2,2 | | 20150417 |
| RTS 736 2S | 787 | 736 | 93,5 | 97,2 | 4,8 | | 20150419 |
| RTS 850 2S | 909 | 850 | 93,5 | 97,2 | 6,8 | (1) | 20150434 |
| RTS 1012 2S | 1082 | 1012 | 93,5 | 97,2 | 6,1 | (1) | 20150420 |
| RTS 1200 2S | 1283 | 1200 | 93,5 | 97,2 | 9,8 | (1) | 20150435 |
| RTS 1355 2S | 1449 | 1355 | 93,5 | 97,2 | 5,1 | (1) | 20150432 |
| RTS 1500 2S | 1609 | 1500 | 93,2 | 97,2 | 7 | (1) | 20150437 |
| RTS 1850 2S | 1980 | 1850 | 93,5 | 97,2 | 7,2 | (1) | 20150433 |

Maximum operating pressure: 6 bar.

(1) For orders please contact Sales Department.

ACCESSORIES

| Description | Code |
|-------------------------------|-----------------|
| MECHANICAL ACCESSORIES | |
| Burner flange | 4031188 |
| Burner flange | 4031196 |
| Burner flange | 4031395 |
| Burner flange | 20043900 |
| Burner flange | 20047680 |
| Burner flange | 20065920 |
| Burner flange | 4031186 |
| Burner flange | 4031192 |
| Burner flange | 4031198 |
| Burner flange | 20043899 |
| Burner flange | 20184817 |

CONTROL PANELS

| Description | Installation | Code | Boiler model |
|---------------------------------|--------------|-----------------|-------------------|
| RIELLOtech CLIMA COMFORT | Vertical | 4031069 | All models |
| RIELLOtech PRIME | Vertical | 20010820 | All models |
| RIELLOtech PRIME ACS | Vertical | 20010437 | All models |

Gestione climatica con RIELLOtech Clima Comfort.

Gestione termostatica con RIELLOtech PRIME.

NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 323.

RECOMMENDED COMBINATIONS WITH BURNERS - EU COUNTRIES

| Description | Back-pressure in combustion chamber (mbar) | Gas burner | | | | | | | | | | | Burner flange | | | | Control panels | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------------------|-----------|-----------|----------------|-------------|----------|----------------------|----------------|-------------|---------------|---------------|-----------------|-----------------|-----------------|----------------|----------------|--------------|--------------|--------------|-------------|-------------|---------------|---------------|---------------|---------------|---------------|-------------------|---------------------------|---------------------------------|------------------------|--|--|--|--|--|
| | | Yellow flame (Standard) | | | | | | Blue flame (Low NOx) | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | One stage | Two stage | | Modulating | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | - | - | | Mechanical cam | | | | Electronic cam | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | RS 44/1 MZ TC | RS 100 TC | RS 130 TC | RS 190 TC | RS 44 MZ TC | RS 50 TC | RS 100/M TC | RS 130/M TC | RS 190/M TC | RS 44/M MZ TC | RS 50/M MZ TC | RS 120/M BLU TC | RS 160/M BLU TC | RS 200/M BLU TC | RS 45/M BLU TC | RS 68/M BLU TC | RS 120/E BLU | RS 160/E BLU | RS 200/E BLU | RS 45/E BLU | RS 68/E BLU | Burner flange | Burner flange | Burner flange | Burner flange | Burner flange | Riellotherm Prime | Riellotherm Klima Comfort | Two stage burner management kit | 3-point modulation kit | | | | | |
| 3788610 | 3785302 | 3785502 | 3785813 | 3789110 | 3784702 | 3789710 | 3789810 | 3787623 | 3788810 | 3781622 | 3897606 | 3788006 | 3899710 | 3897306 | 3897406 | 3897632 | 3788032 | 3899810 | 3897332 | 3897432 | 20043900 | 20047680 | 20065920 | 4031188 | 4031196 | 4031395 | 20010820 | 4031069 | 4031067 | 20013035 | | | | | | |
| RTS 410 2S | 3,70 | ● | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3,70 | | | | ● | | | | | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 3,70 | | | | | | | | ● | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 3,70 | | | | | | | | | | | | | | ● | | | | | | | | | | | | | | | | | | | | | |
| | 3,70 | | | | | | | | | | | | | | | | | | ● | | | | | | | | | | | | | | | | | |
| RTS 526 2S | 2,20 | | | | | ● | | | | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 2,20 | | | | | | | | | ● | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 2,20 | | | | | | | | | | | | | | ● | | | | | | | | | | | | | ● | | | | | | | | |
| | 2,20 | | | | | | | | | | | | | | | | | | ● | | | | | | | | | ● | | | | | | | | |
| RTS 739 2S | 4,80 | | ● | | | | | | | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 4,80 | | | | | | ● | | | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 4,80 | | | | | | | | | | ● | | | | | | | | | | | | | | | | | | ● | | | | | | | |
| | 4,80 | | | | | | | | | | | | | | | ● | | | | | | | | | | | | | ● | | | | | | | |
| RTS 850 2S | 6,80 | | ● | | | | | | | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 6,80 | | | | | | ● | | | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 6,80 | | | | | | | | | | ● | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 6,80 | | | | | | | | | | | | | | | ● | | | | | | | | | | | | ● | | | | | | | | |
| RTS 1012 2S | 6,10 | | ● | | | | | | | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 6,10 | | | | | | ● | | | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 6,10 | | | | | | | | | | ● | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 6,10 | | | | | | | | | | | | | | | ● | | | | | | | | | | | | ● | | | | | | | | |
| RTS 1200 2S | 9,80 | | | ● | | | | | | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 9,80 | | | | | | ● | | | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 9,80 | | | | | | | | | | ● | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 9,80 | | | | | | | | | | | | | | | | ● | | | | | | | | | | | ● | | | | | | | | |
| RTS 1355 2S | 5,10 | | | ● | | | | | | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 5,10 | | | | | | | | ● | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 5,10 | | | | | | | | | | ● | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 5,10 | | | | | | | | | | | | | | | | ● | | | | | | | | | | | ● | | | | | | | | |
| RTS 1500 2S | 7,00 | | | ● | | | | | | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 7,00 | | | | | | | | ● | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 7,00 | | | | | | | | | | ● | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 7,00 | | | | | | | | | | | | | | | | ● | | | | | | | | | | | ● | | | | | | | | |
| RTS 1850 2S | 7,20 | | | ● | | | | | | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 7,20 | | | | | | | | ● | | | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 7,20 | | | | | | | | | | ● | | | | | | | | | | | | | | | | | ● | | | | | | | | |
| | 7,20 | | | | | | | | | | | | | | | | ● | | | | | | | | | | | ● | | | | | | | | |

NOTE: the gas burners must be completed with the gas train.

NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 323.

RECOMMENDED COMBINATIONS WITH BURNERS – EXTRA EU COUNTRIES

| Description | Back-pressure in combustion chamber (mbar) | Gas burner | | | | | | Burner flange | | | | | | Control panels | | | | | | | | | | | | | |
|-------------|--|-------------------------|---------------|-----------|-----------|----------------|-------------|---------------|-------|-------------|-------------|-------------|---------------|----------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|-------------------|---------------------------|---------------------------------|------------------------|--|
| | | Yellow flame (Standard) | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | One stage | | Two stage | | Modulating | | | | | | | | | | | | | | | | | | | | | |
| | | - | | - | | Mechanical cam | | | | | | | | | | | | | | | | | | | | | |
| | | RS 34/1 MZ TC | RS 44/1 MZ TC | RS 100 TC | RS 130 TC | RS 190 TC | RS 44 MZ TC | RS 50 TC | RS 5D | RS 100/M TC | RS 130/M TC | RS 190/M TC | RS 34/M MZ TC | RS 44/M MZ TC | RS 50/M MZ TC | Burner flange | Burner flange | Burner flange | Burner flange | Burner flange | Burner flange | Burner flange | Riellotherm Prime | Riellotherm Klima Comfort | Two stage burner management kit | 3-point modulation kit | |
| RTS 247 2S | 3,00 | • | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3,00 | | | | | | | • | | | | | | | | | | | | | | | | | | | |
| | 3,00 | | | | | | | | | | | | • | | | | | | | | | | | | | | |
| RTS 319 2S | 2,40 | • | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2,40 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2,40 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 410 2S | 3,70 | | • | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3,70 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3,70 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 526 2S | 2,20 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2,20 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 739 2S | 4,80 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 4,80 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 850 2S | 6,80 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 6,80 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 1012 2S | 6,10 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 6,10 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 1200 2S | 9,80 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 9,80 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 1355 2S | 5,10 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 5,10 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 1500 2S | 7,00 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 7,00 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 1850 2S | 7,20 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 7,20 | | | | | | | | | | | | | | | | | | | | | | | | | | |

NOTE: the gas burners must be completed with the gas train.
 NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 323.

| Description | Back-pressure in combustion chamber (mbar) | Gas burner | | | | | | | | | | Burner flange | | | | | | | Control panels | | | | | | | | | | | | | | | | | | |
|-------------|--|----------------------|-----------|----------------|---------|---------|---------|-----------------|-----------------|-----------------|----------------|----------------|----------------|----------------|--------------|--------------|--------------|-------------|----------------|-------------|-------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|-----------------|-------------------------|---------------------------------|------------------------|----------|--|--|
| | | Blue flame (Low NOx) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | One stage | Two stage | Modulating | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | - | - | Mechanical cam | | | | | Electronic cam | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | BS3 | BS4 | BS3D | BS4D | BS3/M | BS4/M | RS 120/M BLU TC | RS 160/M BLU TC | RS 200/M BLU TC | RS 25/M BLU TC | RS 35/M BLU TC | RS 45/M BLU TC | RS 68/M BLU TC | RS 120/E BLU | RS 160/E BLU | RS 200/E BLU | RS 25/E BLU | RS 35/E BLU | RS 45/E BLU | RS 68/E BLU | Burner flange | Burner flange | Burner flange | Burner flange | Burner flange | Burner flange | Burner flange | Burner flange | Burner flange | Rielotech Prime | Rielotech Clima Comfort | Two stage burner management kit | 3-point modulation kit | | | |
| | | 3761316 | 3761416 | 3761716 | 3761816 | 3762350 | 3762450 | 3897606 | 3788006 | 3899710 | 3910510 | 3910610 | 3897306 | 3897406 | 3897632 | 3788032 | 3899810 | 3910710 | 3910810 | 3897332 | 3897432 | 20043899 | 20043900 | 20047680 | 20065920 | 4031186 | 4031192 | 4031196 | 4031198 | 4031395 | 20184817 | 20010820 | 4031069 | 4031067 | 20013035 | | |
| RTS 115 2S | 1,20 | • | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1,20 | | | • | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1,20 | | | | | • | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 150 2S | 1,60 | • | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1,60 | | | • | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1,60 | | | | | • | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 200 2S | 1,80 | | • | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1,80 | | | | • | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1,80 | | | | | | | | | • | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1,80 | | | | | | | | | | | | | | | | | • | | | | | | | | | | | | | | | | | | | |
| RTS 247 2S | 3,00 | | | | | | | | | | • | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3,00 | | | | | | | | | | | | | | | | | • | | | | | | | | | | | | | | | | | | | |
| RTS 319 2S | 2,40 | | | | | | | | | | | • | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2,40 | | | | | | | | | | | | | | | | | | • | | | | | | | | | | | | | | | | | | |
| RTS 410 2S | 3,70 | | | | | | | | | | | • | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3,70 | | | | | | | | | | | | | | | | | | | • | | | | | | | | | | | | | | | | | |
| RTS 526 2S | 2,20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2,20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 739 2S | 4,80 | | | | | | | • | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 4,80 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 850 2S | 6,80 | | | | | | | • | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 6,80 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 1012 2S | 6,10 | | | | | | | • | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 6,10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 1200 2S | 9,80 | | | | | | | | • | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 9,80 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 1355 2S | 5,10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 5,10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 1500 2S | 7,00 | | | | | | | | • | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 7,00 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RTS 1850 2S | 7,20 | | | | | | | | | • | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 7,20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

NOTE: the gas burners must be completed with the gas train.
 NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 323.

HEAT PUMPS

WALL-HUNG BOILERS

FLOOR-STANDING BOILERS

WATER-HEATERS

SOLAR THERMAL AND CYLINDERS

CENTRALIZED HEATING

AIR CONDITIONING

TERMINAL UNITS

SYSTEM COMPLEMENTARY ITEMS

HOT AIR GENERATORS

| Description | Back-pressure in combustion chamber (mbar) | Dual fuel burner | | | | | | | | Burner flange | | | | | | | | Control panels | | | | | | | |
|-------------|--|-------------------------|--------|----------------|--------|----------------------|--------------|----------------|--------|---------------|--------|--------|---------|--------------|--------------|---------------|---------------|----------------|---------------|---------------|---------------|---------------|---------------|------------------|---------------------------------|
| | | Yellow flame (Standard) | | | | Blue flame (Low NOx) | | | | | | | | | | | | | | | | | | | |
| | | Two stage | | Modulating | | Two stage | | Modulating | | | | | | | | | | | | | | | | | |
| | | - | | Mechanical cam | | - | | Mechanical cam | | | | | | | | | | | | | | | | | |
| | | RLS 28 | RLS 38 | RLS 50 | RLS 70 | RLS 100 | RLS 190/M MZ | RLS 250/M MZ | RLS 28 | RLS 38 | RLS 50 | RLS 70 | RLS 100 | RLS 190/M MZ | RLS 250/M MZ | Burner flange | Burner flange | Burner flange | Burner flange | Burner flange | Burner flange | Burner flange | Burner flange | RielloTech Prime | Two stage burner management kit |
| RTS 150 2S | 1,60 | ● | | | | | | | | | | | | | | | | | | | | | | ● | ● |
| | 1,60 | | | | | | | | ● | | | | | | | | | | | | | | | ● | ● |
| RTS 200 2S | 1,80 | ● | | | | | | | | | | | | | | | | | | | | | | ● | ● |
| | 1,80 | | | | | | | | ● | | | | | | | | | | | | | | | ● | ● |
| RTS 247 2S | 3,00 | ● | | | | | | | | | | | | | | | | | | | | | | ● | ● |
| | 3,00 | | | | | | | | ● | | | | | | | | | | | | | | | ● | ● |
| RTS 319 2S | 2,40 | | ● | | | | | | | | | | | | | | | | | | ● | | | ● | ● |
| | 2,40 | | | | | | | | | ● | | | | | | | | | | | | | | ● | ● |
| RTS 410 2S | 3,70 | | | ● | | | | | | | | | | | | | | | | | | | | ● | ● |
| | 3,70 | | | | | | | | | ● | | | | | | | | | | | | | | ● | ● |
| RTS 526 2S | 2,20 | | | | ● | | | | | | | | | | | | | | | | ● | | | ● | ● |
| | 2,20 | | | | | | | | | | ● | | | | | | | | | | | ● | | ● | ● |
| RTS 739 2S | 4,80 | | | | ● | | | | | | | | | | | | | | | | | | | ● | ● |
| | 4,80 | | | | | | | | | | ● | | | | | | | | | | | | | ● | ● |
| RTS 850 2S | 6,80 | | | | | ● | | | | | | | | | | | | | | | | | | ● | ● |
| | 6,80 | | | | | | | | | | | ● | | | | | | | | | | | | ● | ● |
| RTS 1012 2S | 6,10 | | | | | ● | | | | | | | | | | ● | | | | | | | | ● | ● |
| | 6,10 | | | | | | | | | | | ● | | | | ● | | | | | | | | ● | ● |
| RTS 1200 2S | 9,80 | | | | | | ● | | | | | | | | | | ● | | | | | | | ● | ● |
| | 9,80 | | | | | | | | | | | | ● | | | | ● | | | | | | | ● | ● |
| RTS 1355 2S | 5,10 | | | | | | ● | | | | | | | | | | ● | | | | | | | ● | ● |
| | 5,10 | | | | | | | | | | | | ● | | | | ● | | | | | | | ● | ● |
| RTS 1500 2S | 7,00 | | | | | | ● | | | | | | | | | | ● | | | | | | | ● | ● |
| | 7,00 | | | | | | | | | | | | ● | | | | ● | | | | | | | ● | ● |
| RTS 1850 2S | 7,20 | | | | | | | ● | | | | | | | | | ● | | | | | | | ● | ● |
| | 7,20 | | | | | | | | | | | | ● | | | | ● | | | | | | | ● | ● |

NOTE: for specific accessories, connection MODBUS and more details on control panels, please refer to page 323.